

# JOINTBOY

The perfect tool  
for every elastic joint!

Standard

Because of the special active ingredient,  
JOINTBOY can be used  
without parting agents.

For all types of  
silicon and acrylic!

**0 mm:**

For the complete removal of  
freshly applied joint material.

**2 / 3 / 4 / 5 / 6 mm:**

For all standard joints not subject  
to traction or pressure stresses  
(e.g. mirrors, wash hand basins).

**8 / 10 mm:**

For all standard joints subject to  
traction or pressure stresses  
(e.g. baths, showers, kitchen work-  
tops, corners on floors/walls with tiles).

**14 / 20 mm:**



For wide to extremely wide joints subject to traction  
or pressure stresses (e.g. corners on floors/walls  
with tiles, masonry, refurbishment etc.).

For **expansion joints** (e.g. on floors) with rounded  
tiles and for joints that are to be recessed a round  
tool should be used.


With both **grooves** you will even be able to manage  
catchiest finished edges.

for  
professionals!

0 mm  
2 mm  
3 mm  
4 mm  
5 mm  
6 mm  
8 mm  
10 mm  
14 mm  
20 mm  
groove

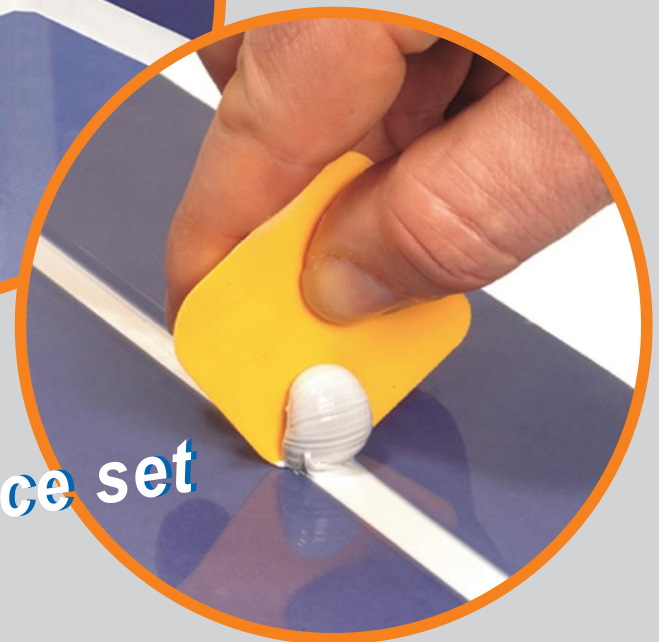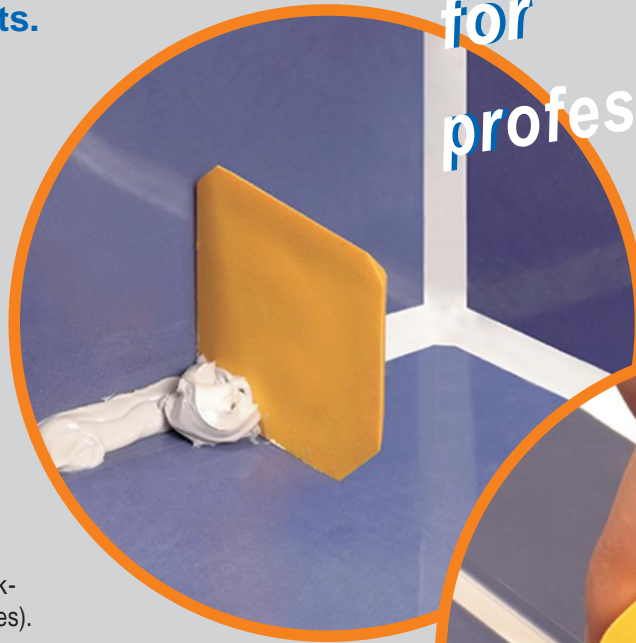

4-piece set

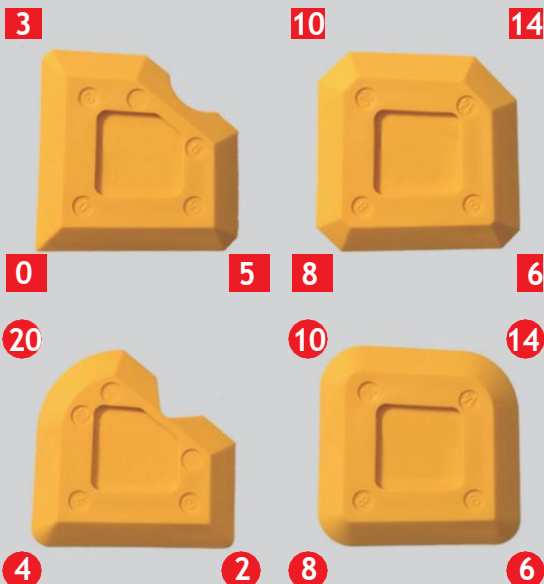

The 4-piece JOINTBOY STANDARD set  
offers you 16 options for creating silicon  
joints in different variants using a dry  
technique.

JOINTBOY STANDARD works without parting  
agents. There is no need to dampen in the  
sealing compound with a detergent solution.

You will also be able to produce perfect seals  
on connecting joints and expansion joints  
without masking or time-consuming follow-  
up work.

JOINTBOY STANDARD is a special tool in  
tested craftsman quality: it is resistant to  
acids and friction and is extremely flexible.

